

THE MODERNIZATION OF THE MAC – 3 MACHINES FROM THE SUBSTITUTION OF THE MECHANISM OF THE PRESSING ROOM

Prof. PhD.Eng. DAVID Ladislau*, Prof. PhD.Eng. DINU Ion*

*University „Politehnica” of Bucharest - Faculty of Biotechnical Systems Engineering,
david.ladislau@yahoo.com

Abstract:

In this paper is presented the press room of the MAC – 3 machines endowed with two pressing mechanisms, while also showing the advantages of the new system. Also is presented the diagram of the tow pressing mechanisms is also given, while equations are established for determining the speed distribution by using the independent cycle method.

Keywords: MAC – 3 machine, pressing room, pressing mechanism

Introduction

MAC – 3 machines works in aggregate with U – 650M tractor and is destined to harvest the stems of corn, sunflower, drying hay put in furrow, creeping stalk of beans, pea etc [1]. The machine works on the ground plane or on the flank with inclination until 10^0 [2]. The material that was added is press and unloads like a hayrick at the extremities of the plots.

MAC – 3 machines had a mechanism for feeding the pressing room, a mechanism with gear quadrant [4]. In place of this mechanism are introduced a new mechanism formed by articulated beams, replaced the gear quadrants of the vehicle mechanism.

Paper data

In figure 1 is presented the scheme of the pressing mechanism vehicle who is formed from nine mobile elements (the 3 and 4 elements had tow semi crows cogged with contact in point N), 12 superior kinematics couples:

- inferior couples $i = A, B, C, D, E, F, G, H, L, K, M, R, P$
 - superior couples $s = N, G$.
- $i = 12$ – inferior couples;
 $s = 2$ – superior couples;
 $m = 9$ – mobile elements.

The mobility degree of the mechanism is calculated with the relation (1):

$$M = 3m - 2i - s \tag{1}$$

Therefore: $M = 3 \cdot 9 - 2 \cdot 12 - 2 = 1$

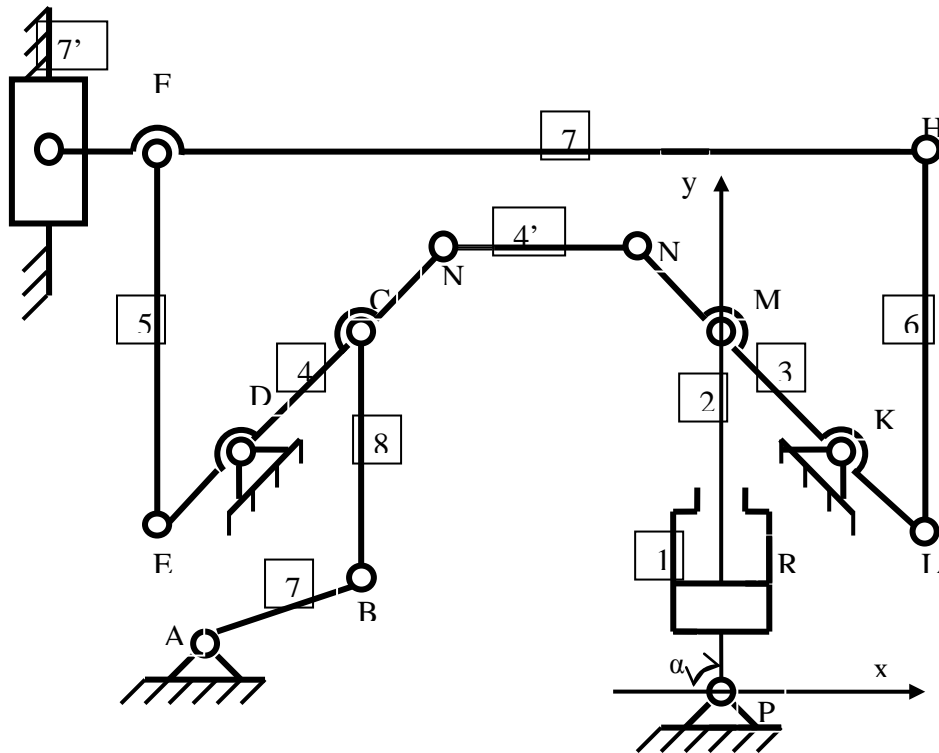


Fig. 2. Scheme of the new pressing mechanism

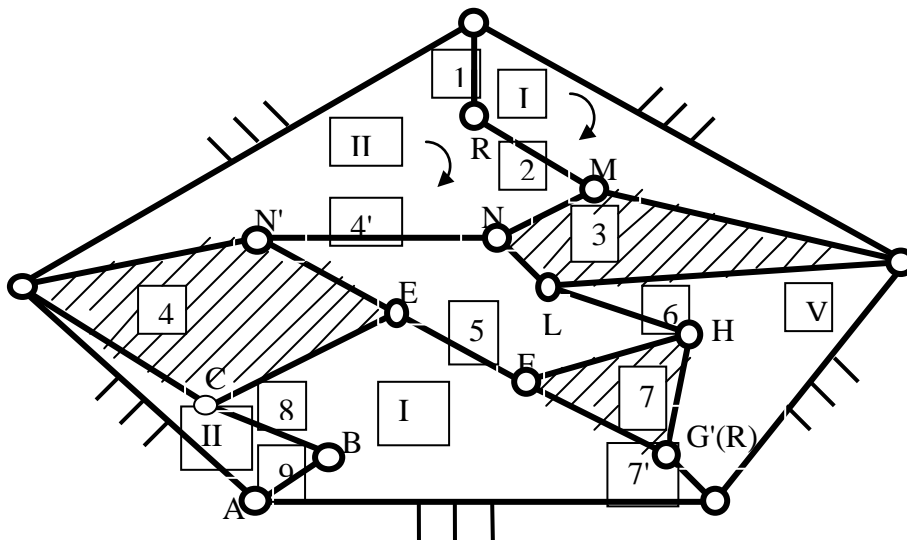


Fig.3. The graph associated at the new pressing mechanism

Considering an axis system xOy in the plane mechanism, with the origin in P, and knowing the x and y coordinates of the kinematics couples is obtained the equations system (2).

$$\begin{cases}
 v_{R21}^x + v_{M32}^x - \omega_1(y_R - y_P) - \omega_2(y_M - y_R) - \omega_3(y_K - y_M) = 0 \\
 v_{R21}^y + v_{M32}^y + \omega_1(x_R - x_P) + \omega_2(x_M - x_R) + \omega_3(x_K - x_M) = 0 \\
 v_{R21}^x + v_{M32}^x + v_{N4'3}^x + v_{N'44'}^x - \omega_1(y_R - y_P) - \omega_2(y_M - y_R) - \omega_3(y_N - y_M) - \\
 - \omega_{4'}(y_{N'} - y_N) - \omega_4(y_D - y_{N'}) = 0 \\
 v_{R21}^y + v_{M32}^y + v_{N4'3}^y + v_{N'44'}^y + \omega_1(x_R - x_P) + \omega_2(x_M - x_R) + \omega_3(x_N - x_M) - \\
 - \omega_{4'}(x_{N'} - x_N) - \omega_4(x_D - x_{N'}) = 0 \\
 v_{C84}^x + v_{B98}^x - \omega_4(y_C - y_D) - \omega_8(y_B - y_C) - \omega_9(y_A - y_B) = 0 \\
 v_{C84}^y + v_{B98}^y + \omega_4(x_C - x_D) + \omega_8(x_B - x_C) + \omega_9(x_A - x_B) = 0 \\
 v_{B89}^x + v_{C48}^x + v_{E54}^x + v_{F7'5}^x + v_{G'7'7}^x - \omega_9(y_B - y_A) - \omega_8(y_C - y_B) - \omega_4(y_E - y_C) - \\
 - \omega_5(y_F - y_E) - \omega_{7'}(y_G - y_{G'}) = 0 \\
 v_{B89}^y + v_{C48}^y + v_{E54}^y + v_{F7'5}^y + v_{G'7'7}^y + \omega_9(x_B - x_A) + \omega_8(x_C - x_B) + \omega_4(x_E - x_C) + \\
 + \omega_5(x_F - x_E) - \omega_{7'}(x_G - x_{G'}) = 0 \\
 v_{G7'0}^x + v_{G'7'7}^x + v_{H67}^x + v_{L36}^x - \omega_{7'}(y_{G'} - y_G) - \omega_7(y_H - y_{G'}) - \omega_6(y_L - y_H) - \\
 - \omega_3(y_K - y_L) = 0 \\
 v_{G7'0}^y + v_{G'7'7}^y + v_{H67}^y + v_{L36}^y + \omega_{7'}(x_{G'} - x_G) + \omega_7(x_H - x_{G'}) + \omega_6(x_L - x_H) + \\
 + \omega_3(x_K - x_L) = 0
 \end{cases} \quad (2)$$

The kinematics conditions from bundles are presented in form (3)

$$\begin{aligned}
 \frac{v_{R21}^y}{v_{R21}^x} &= -tg\alpha & v_{E54}^x &= v_{E54}^y = 0 \\
 v_{M32}^x &= v_{M32}^y = 0 & v_{F7'5}^x &= v_{F7'5}^y = 0 \\
 v_{N4'3}^x &= v_{N4'3}^y = 0 & v_{G'7'7}^x &= v_{G'7'7}^y = 0 \\
 v_{N'44'}^x &= v_{N'44'}^y = 0 & v_{G7'0}^x &= 0 \\
 v_{C48}^x &= v_{C48}^y = 0 & v_{H67}^x &= v_{H67}^y = 0 \\
 v_{B98}^x &= v_{B98}^y = 0 & v_{L36}^x &= v_{L36}^y = 0
 \end{aligned} \quad (3)$$

Introducing the conditions (3) in equations system (2) is obtained the equations system (4).

$$\left\{ \begin{array}{l}
 v_{R21}^x - \omega_1(y_R - y_P) - \omega_1(y_M - y_R) - \omega_3(y_K - y_M) = 0 \\
 -v_{R21}^x \operatorname{tg} \alpha + \omega_1(x_R - x_P) + \omega_1(x_M - x_R) + \omega_3(x_K - x_M) = 0 \\
 v_{R21}^x - \omega_1(y_R - y_P) - \omega_1(y_M - y_R) - \omega_3(y_N - y_M) - \omega_{4'}(y_{N'} - y_N) - \\
 - \omega_4(y_D - y_{N'}) = 0 \\
 -v_{R21}^x \operatorname{tg} \alpha + \omega_1(x_R - x_P) + \omega_1(x_M - x_R) + \omega_3(x_N - x_M) + \omega_{4'}(x_{N'} - x_N) + \\
 + \omega_4(x_D - x_{N'}) = 0 \\
 -\omega_4(y_C - y_D) - \omega_8(y_B - y_C) - \omega_9(y_A - y_B) = 0 \\
 \omega_4(x_C - x_D) + \omega_8(x_B - x_C) + \omega_9(x_A - x_B) = 0 \\
 -\omega_9(y_B - y_A) - \omega_8(y_C - y_B) - \omega_4(y_E - y_C) - \omega_5(y_F - y_E) = 0 \\
 \omega_9(x_B - x_A) + \omega_8(x_C - x_B) + \omega_4(x_E - x_C) + \omega_5(x_F - x_E) = 0 \\
 -\omega_7(y_H - y_{G'}) - \omega_6(y_L - y_H) - \omega_3(y_K - y_L) = 0 \\
 \omega_7(x_H - x_{G'}) + \omega_6(x_L - x_H) + \omega_3(x_K - x_L) = 0 \\
 -\omega_6(y_L - y_H) - \omega_3(y_K - y_L) = 0 \\
 \omega_6(x_L - x_H) + \omega_3(x_K - x_L) = 0
 \end{array} \right. \quad (4)$$

The constructive conditions are:

$$\omega_1 = \omega_2 = \dots\dots\dots$$

$$\omega_{7'} = 0 \quad (5)$$

$$\omega_7 = \omega_{41} = 0$$

Introducing in system (4), the constructive conditions is obtained the equation system (6).

$$\left\{ \begin{array}{l}
 v_{R21}^x - \omega_1(y_M - y_P) - \omega_3(y_K - y_M) = 0 \\
 -v_{R21}^x \operatorname{tg} \alpha + \omega_1(x_M - x_P) + \omega_3(x_K - x_M) = 0 \\
 v_{R21}^x - \omega_1(y_M - y_P) - \omega_3(y_N - y_M) - \omega_4(y_D - y_{N'}) = 0 \\
 -\omega_4(y_C - y_D) - \omega_8(y_B - y_C) - \omega_9(y_A - y_B) = 0 \\
 \omega_4(x_C - x_D) + \omega_8(x_B - x_C) + \omega_9(x_A - x_B) = 0 \\
 -\omega_9(y_B - y_A) - \omega_8(y_C - y_B) - \omega_4(y_E - y_C) - \omega_5(y_F - y_E) = 0 \\
 \omega_9(x_B - x_A) + \omega_8(x_C - x_B) + \omega_4(x_E - x_C) + \omega_5(x_F - x_E) = 0 \\
 \omega_6(x_L - x_H) + \omega_3(x_K - x_L) = 0
 \end{array} \right. \quad (6)$$

The equations system (6) is a homogeneous system of eight kinematic unknowns who can be determined.

The kinematic unknowns are: $v_{R21}^x, \omega_1, \omega_3, \omega_4, \omega_5, \omega_6, \omega_8, \omega_9$. These unknowns can be determined from the equations system (6) who is a homogeneous system.

Having angular speeds and translation speeds of the mechanism with the help of the fundamentals of the apparent speed be determinate the maximum value of the pressing force.

Conclusions

Replacing of the old mechanism of the machine, lead at a better working, from removing the frictions and vibrations from gear quadrants to a metal economy and at a constructive achievement more simple.

References

- [1]. Tutunaru D., *Mecanisme plane*, Editor Tehnica, 1969.
- [2]. Voinea R., Atanasiu M., *Metode analitice noi în teoria mecanismelor*, Editor Tehnica, 1964.
- [3]. Dinu I., *Mecanică teoretică*, Editor Printech, 1999.
- [4]. Voinea R., Voiculescu D., Simion F.P., *Mecanica Solidului*, Editor Academiei, 1989.
- [5]. Duțu (David) Mihaela Florentina, Voicu Gh., David L., Rusănescu C.O., *Experimental Analysis Considered of Mobiles Agricultural Aggregates*, Bulletin of University of Agricultural Sciences and \ Veterinary Medicine Cluj-Napoca, Series Agriculture, Vol.66, Iss.1, ISSN 1843-5246
- [6]. Rusănescu C.O., Gruia A., Duțu (David) Mihaela Florentina, Stoica D., *Solar power installation hot water to housinh family type*, Proceedings of 2012 International Conferences of Hydraulics and Pneumatics HERVEX, Ediția a XX-a, Călimănești-Căciulata, ISSN 1454-8003, pp.430-433, 7-9 noiembrie 2012
- [7]. Blejan M.; Duțu I.; Ilie I.; Drumea P.; Comes M. *Electronic intelligent module for a hydraulic briquetting press.*, DOI: 10.1109/ISSE.2008.5276664, Electronics Technology, 2008. ISSE '08. 31st International Spring Seminar on. 7-11 May, 2008, Budapest, Hungary pp.340-342.
- [8]. Ion Guta, D. D., Popescu, T. C., Dumitrescu, C., *Optimization of hydrostatic transmissions by means of virtual instrumentation technique*, OPTIROB 2010.
- [9]. Comes, M., Drumea, A., Mirea, A., Matache, G., - *Intelligent servohydraulic device for the control of the motion* – 24th International Spring Seminar on Electronics Technology ISSE 2001